




## Dielectric Matting Non-Conductive Corrugated Switchboard



- Extra-thick vinyl runner with corrugated PVC surface for added traction
- Long-lasting 1/4" thick construction
- Protects workers from high voltage equipment
- Recommended maximum usage – 17,000 volts (VAC)
- Dielectric strength to 30,000 volts (VAC)
- Meets requirements of ANSI/ASTMD-178-01 Type II, Class 2
- Grounding snap installed on all standard mats
- Use near fuse boxes, control panels, high voltage work cells, and heavy electrical equipment up to 17,000 volts

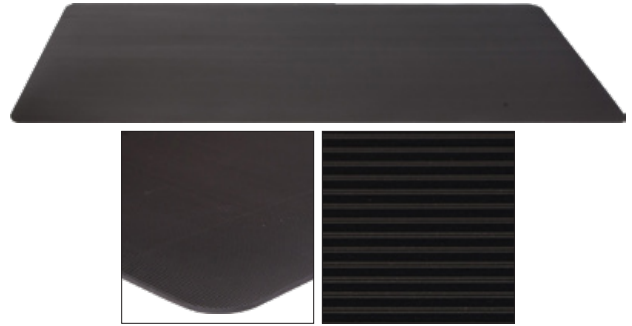

Width (Ft.)	Length (Ft.)	Thickness (Inches)	Color	Item No.	Pkg. Qty.
3	4	1/4	Black	<b>1639035</b>	1
	6	1/4	Black	<b>1639036</b>	1
4	4	1/4	Black	<b>1639037</b>	1
	6	1/4	Black	<b>1639038</b>	1

*\*Usually ships 14-21 days from manufacturer*

NOTE: Mat sizes are approximate as rubber shrinks and expands in conjunction with temperature and time. Tolerable manufacturing size variance is 3-5%.